



FEATURES

- High power 2000 lumen 15W 6500k COB LED
- Tough heavy duty Aluminium, TPR & nylon construction
- Low profile design for easy storage & transport
- Intelligent heat dissipating design
- 180° Adjustable stand with hole for attaching to tripods
- 2A USB powerbank for charging devices
- Memory switch - remembers last mode used
- IP65 Dust & water resistant
- IK07 Shock proof & 2m drop resistant
- Powerful 3.7v 5200mAh Li-ion battery
- 5 Battery level & charging indicators, plus low battery warning
- Fast USB-C 2A charging - 3½ hour charge time
- 1m USB-C charging cable included

BATTERY - 3.7v 5200mAh Li-ion Rechargeable Battery

WEIGHT - 610g


DIMENSIONS - W 172.5 x H 112 x D 49mm

OPERATION

RIGHT SWITCH - On/Off. Press to activate the lamp. Keep pressing to get the desired light output.

Memory Function - If left ON in any mode for 5+ seconds, next press will turn OFF. Next press ON will return to the last mode used.

LEFT SWITCH - Battery level. When the lamp is Off, press this switch to show battery level remaining. The indicators will illuminate for 5 seconds. They automatically illuminate when the lamp is turned On.

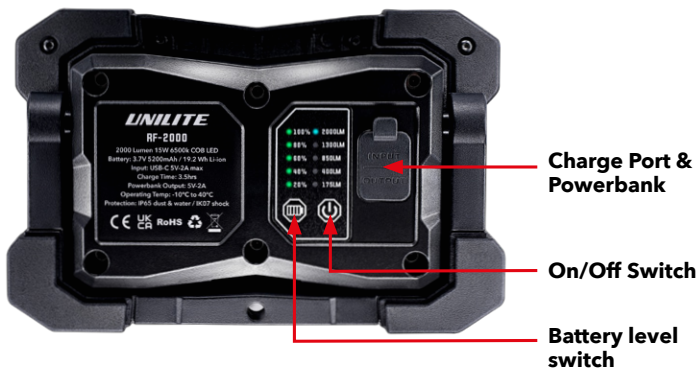

ANSI FL1 Standard



ANSI FL1 Standard	Beam Spread	Runtime	Beam Diameter
100%	2000 Lumen	56 M	3 H
80%	1300 Lumen	43 M	4 H
60%	850 Lumen	31 M	6 H
40%	400 Lumen	26 M	12 H
20%	175 Lumen	15 M	25 H

CHARGING

1. Only use a 5V USB-C cable (max 2A).
2. Lift the charge port cover on the back of the lamp.
3. Plug the USB-C end of the cable into the USB-C charge port.
4. Plug the USB-A end of the cable into a USB charging port (do not exceed 5V-2A charging input or damage may occur).
5. The 5 x battery indicators will illuminate and flash to show charging status. Once fully charged, all the indicator LEDs will illuminate continually.
6. If the battery indicators do not illuminate, remove the cable and try again.
7. Charge Time: 3½ hours
8. Make sure the charge port cover is secured back in place.

Fully charge before first use.

Warranty void if not used with the specified cable & max charge input

POWER BANK

The lamp can also be used as a 2A Powerbank. Plug the USB-A end of your devices charging cable into the USB-A port on the back of the lamp. Make sure the charge port cover is secured back in place after use.

ADVICE & IMPORTANT INFORMATION!

- LEDs will become hot when switched on; do not touch and never place face down on any surface - risk of fire! Even once the lamp has been switched off, DO NOT place face down or let anything touch the lens as it will stay hot/warm for a while.
- Do not look directly at LEDs.
- Do not operate in direct sunlight or extreme temperature conditions (below -10°C or above 40°C).
- Do not use the device if there is any visible damage.
- Take care when using USB plug adaptors, check for any damage first. Check the charging output on the plug and DO NOT EXCEED the stated Maximum charging input or damage may occur to the battery and may void the warranty.
- The rechargeable battery will reach full performance after a few complete charging and discharging cycles.
- To keep the rechargeable battery in optimum condition, it should be recharged every 3-6 months, especially if it is not being used for a long period of time. Always fully charge batteries before storage.
- Always protect lithium batteries from heat, intense sunlight, fire, water and moisture - danger of explosion!
- If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if lithium battery fluid comes into contact with the eyes.
- Children under 12 years of age should only use the product under adult supervision.
- Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.
- Take care not to let lenses come into contact with hard/sharp objects, damage/scratches to lenses will affect light output.
- Do not use the product in the immediate vicinity of flammable materials or gases.
- Before cleaning the product, disconnect the charge cable. Clean with a dry or slightly moist, clean, lint-free cloth and a mild detergent if required. Do not use cleaners that contain abrasives or solvents.
- This product is water resistant to IPX5 - DO NOT SUBMERGE. If the product has been subjected to excessive water the warranty may be void.
- This product has a 1 year standard warranty (or extended to 2 years once registered online at WWW.UNILITE.CO.UK/WARRANTY) against manufacturing faults and defects, commencing on the date of purchase. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover disposable battery leaks or the use of incorrect chargers and cables that can damage rechargeable batteries.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please re-use or recycle packaging responsibly.
- Keep these instructions for future reference or for subsequent possessors.

